The Technology

Certifications



Test reports on FirePro's suitability to suppress Li-Ion battery fires are available upon request.

FireBan Advantages

- Space & weight savings
- 15-year product life
- Easy installation in new or retrofit projects
- Can tolerate small openings
- Easy to transport
- No piping or nozzles required
- Non-pressurized
- Operating temperatures: -50°C to +100°C
- Non-Oxygen Depleting



FireBan fire suppression systems are EPA SNAP listed for Normally Occupied Areas.

Distribution Network

EUROPE	AMERICAS
Albania	Argentina
Austria	Bolivia
Belgium	Brazil
Bulgaria	Canada
Croatia	Chile
Cyprus	Colombia
Czech Republic	Guatemala
Denmark	Mexico
Estonia	Paraguay
Finland	Peru
France	Uruguay
Georgia	USA
Germany	
Greece	GULF &
Hungary	MIDDLE EAST
Iceland	Bahrain
Ireland	Iraq
Italy	Jordan
Latvia	Kuwait
Lithuania	Lebanon
Luxembourg	Oman
Malta	Qatar
Netherlands	Saudi Arabia
Norway	UAE
Poland	
Portugal	
Romania	
Serbia	
Slovakia	
Spain	
Sweden	
Switzerland	
Turkey	
United Kingdom	

LIMITATION OF LIABILITY In no event, regardless of cause, FirePro Systems shall be liable for any indirect, special, incidental, punitive or consequential ch of contract, tort (including negligence), strict liability or otherwise, even if advised of the possibility of such dama



R&D and Production Facilities Limassol, Cyprus EU

Find us on www.fireban.com

ASIA & OCEANIA Australia Bangladesh China Hong Kong India Indonesia Malaysia Maldives Myanmar New Zealand Pakistan Philippines Singapore South Korea Sri Lanka Taiwan Thailand Vietnam



FIREBAN

Lithium-Ion **Batteries**

Fire Protection Systems

AFRICA

Algeria

Angola

Congo

Egypt

Ghana

Kenva

Libya

Mauritania

Mauritius Morocco

Nigeria

Sudan

Tanzania


Tunisia

South Africa

Botswana



Reinventing **Fire Suppression**





Li-Ion **Battery Safety**

Li-lon battery technology, despite being constantly improved, still poses a significant fire hazard.

A mechanical shock or other misuse of the battery may lead to an increase in its internal temperature, triggering a thermal runaway in the affected cells.



R&D

FireBan is at the forefront of research aimed at understanding the diverse fire behaviour of such batteries.

A spherical test chamber, specially designed for FireBan, was used to conduct fire suppression tests, explosive tests and off-gassing analyses.

Our technology has been tested in several Li-lon battery fire scenarios by accredited laboratories and Li-lon battery manufacturers, demonstrating its effectiveness as a final layer of protection against the worst-case scenarios.

ESS System Design

- 1 Fire Alarm and Extinguishing Panel
- 2 System Abort Switch
- ³ Disconnect Switch
- 4 Gas Release Sign
- ⁵ 1st Stage Sounder (Bell)
- 6 2nd Stage Sounder/Beacon (Horn/Strobe)
- 7 FirePro Condensed Aerosol Generators
- ⁸ Sequential Activator
- 9 Combination of different detection technologies Smoke •CO Flame Aspiration Other Linear Heat

How FireBan Works

In the event of a Li-Ion battery fire, the FireBan active agent consisting of potassium salts (K₂CO₂) neutralizes the electrolyte's decomposition products, such as Hydrogen Fluoride (HF), forming stable products (KF, KHF₂). Thus, preventing the formation of highly flammable gases such as Hydrogen (H₂).

The resulting neutralizing action ultimately controls the fire and allows the temperature in the enclosure to drop below the threshold necessary for the thermal runaway to sustain itself.




Applications

Battery Pack Protection

FireBan cylindrical models are compact and provide a practical solution for applications with space limitations such as residential battery-storage systems and electric vehicles.

These generator models are placed within the battery pack compartment and are activated automatically either through electrical or mechanical means.

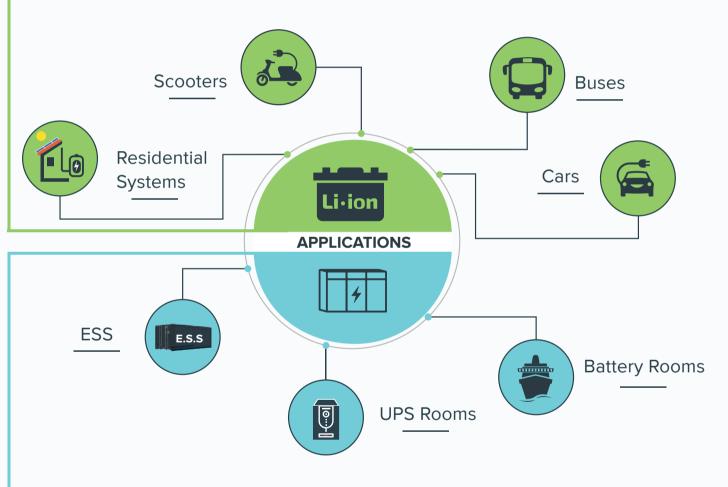

Energy Storage System Protection

Larger volumes such as Battery Energy Storage Systems, usually placed in containers, are protected using our pre-engineered box-type models.

Upon activation of the condensed aerosol generators, the agent totally floods the enclosure, rapidly controlling and suppressing battery fires.

